


## ▶ EMT to Flex Coupling

**Standard:** UL 514B and C22.2 No. 18.3-12

**Material:** Zinc

**Application:** for use to couple EMT to flexible metal conduit or armored cable

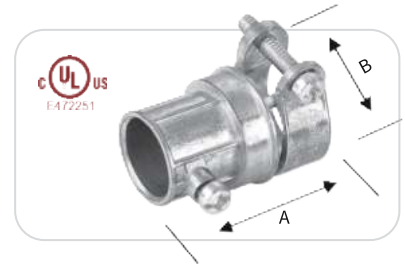


EVT#	Trade Size	Shelf QTY	Master QTY	Dim A (inch)	Dim B (inch)
EF01	1/2"--3/8"	50	500	1.260	0.58~0.62
EF02	1/2"	30	300	1.520	0.74~0.95
EF03	3/4"	20	200	1.830	0.88~1.12
EF04	1"	20	200	1.970	1.14~1.38

## ▶ Interior Flex Connector

**Standard:** UL 514B and C22.2 No. 18.3-12

**Material:** Zinc

**Application:** for use to bond flexible metal conduit to a box or enclosure

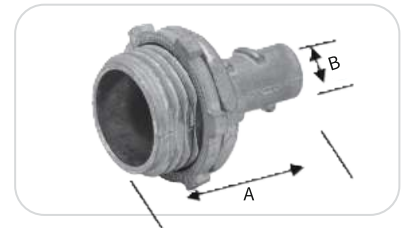


EVT#	Trade Size	Shelf QTY	Master QTY	Dim A (inch)	Dim B (inch)
IFC11	3/8"	150	1500	1.035	0.484
IFC12	1/2"	100	1000	1.118	0.610
IFC13	3/4"	50	500	1.248	0.815
IFC14	1"	30	300	1.366	0.965

## ▶ Clamp Connector for Nonmetallic Cable

**Standard:** UL 514B and C22.2 No. 18.3-12

**Material:** Zinc

**Application:** for use to bond nonmetallic cable to a box or enclosure

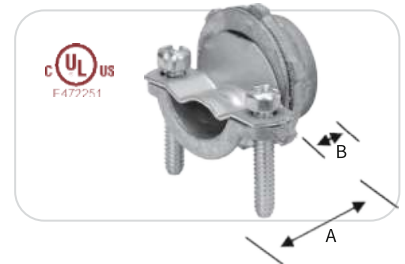

EVT#	Trade Size	Shelf QTY	Master QTY	Dim A (inch)	Dim B (inch)
D0	3/8"	100	1000	0.825	0.421
D1	1/2"	100	1000	0.825	0.421
D2	3/4"	50	500	1.000	0.482
D3	1"	25	250	1.285	0.780
D4	1-1/4"	25	250	1.312	0.710
D5	1-1/2"	15	150	1.453	0.817
D6	2"	10	100	1.590	0.823